


# FIXED TEMPERATURE SENSORS

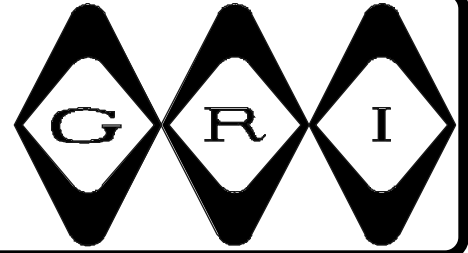

## T8000 SERIES

### *Environmental Sensor for Security and Control Applications*


- ◆ General Temperature Monitoring
- ◆ Low Cost Protection
- ◆ Easy To Install
- ◆ Small, Unobtrusive Surface Mount
- ◆ Fixed Temperature Sensors; 32°F, 41°F, 50°F, 70°F and 140°F



**T8000/T8005/T8050/T8070**



**T8060**

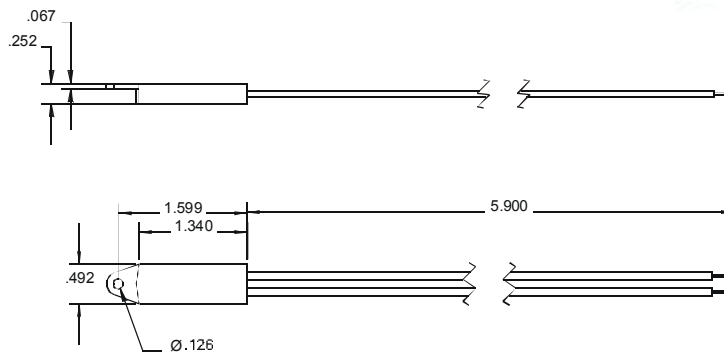

For those property owners who are concerned about frozen water pipes bursting, fluctuating greenhouse temperatures, vacation homes in cold climates or any unattended structure where a fixed temperature is crucial, the GRI T8000 series of fixed temperature sensors provides the proper protection. The T8000 series can be used in computer rooms, walk-in coolers, and similar places where the monitoring of temperature is needed.

Prior to connecting the temperature sensor determine the monitoring application. When the ambient temperature goes below the trip temperature limit, the contacts will open. Is the temperature above or below the trip temperature? Are you monitoring a cold environment to warn you of a heating condition or are you monitoring a warm environment that is critical of colder temperatures? Now make the appropriate connection to your alarm control panel as an open or closed loop for detections. Here's why.

The sensors are pre-set with a temperature limit. When the ambient temperature goes below the trip temperature limit, the switch configuration will change. The T8070 is designed for network operation center rooms, main computer distribution facilities, head ends for CCTV and file server rooms.

#### **Minimum General Specifications:**

CONTACT RATING	VOLTAGE RATING MAX (VDC/VAC)
12VDC/2A	48/250


**WARRANTY:** 6 month warranty against workmanship, material and factory defects.

GEORGE RISK INDUSTRIES, INC.  
GRI PLAZA  
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218  
TOLL-FREE 1-800-523-1227  
(308) 235-4645 • FAX (308) 235-3561  
E-MAIL: [grisales@megavision.com](mailto:grisales@megavision.com)  
WEB SITE: [www.grisk.com](http://www.grisk.com)

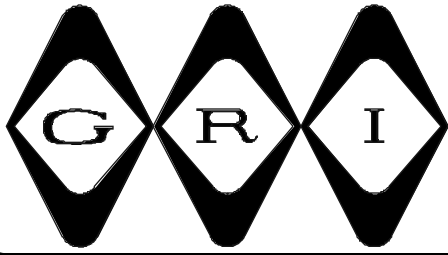


# FIXED TEMPERATURE SENSORS

GRI recommends that you NOT use double faced tape.


## T8000 Electrical Specifications 0° C / 32° F

Contact Arrangement	SPST
Switch Action	<b>CLOSED</b> above Activation Temperature
Maximum Temperature	115° C / 239° F
Activation Temperature	
Nom.	0° C (32.0° F)
Max.	4° C (39° F)
Min.	-4° C (25° F)
Max. Reset Temperature	
Max.	4° C (39° F)
Min.	0° C (32.0° F)
Tolerance	+/- 4° C (+/- 7.2° F)
Lead Lengths	6" #20AWG Leads




## T8005 Electrical Specifications 5° C / 41° F

Contact Arrangement	SPST
Switch Action	<b>CLOSED</b> above Activation Temperature
Maximum Temperature	64° C / 147° F
Activation Temperature	
Nom.	5° C (41.0° F)
Max.	9° C (48° F)
Min.	1° C (34° F)
Max. Reset Temperature	
Max.	8° C (46.4° F)
Min.	5° C (41° F)
Tolerance	+/- 4° C (+/- 7.2° F)
Lead Lengths	6" #20 AWG Leads




## T8050 Electrical Specifications 10° C / 50° F

Contact Arrangement	SPST
Switch Action	<b>CLOSED</b> above Activation Temperature
Maximum Temperature	70° C / 158° F
Activation Temperature	
Nom.	10° C (50.0° F)
Max.	14° C (57° F)
Min.	6° C (43° F)
Max. Reset Temperature	
Max.	14° C (57° F)
Min.	10° C (50° F)
Tolerance	+/- 4° C (+/- 7.2° F)
Lead Lengths	6" #20 AWG Leads




## T8060 Electrical Specifications 60° C / 140° F

Contact Arrangement	SPST
Switch Action	<b>CLOSED</b> above Activation Temperature
Maximum Temperature	115° C / 239° F
Activation Temperature	
Nom.	60° C (140.0° F)
Max.	64° C (147° F)
Min.	56° C (133° F)
Max. Reset Temperature	
Max.	64° C (147° F)
Min.	60° C (140.0° F)
Tolerance	+/- 4° C (+/- 7.2° F)
Lead Lengths	36" Two Conductor Jacketed Leads



## T8070 Electrical Specifications 21° C / 70° F

Contact Arrangement	SPST
Switch Action	<b>CLOSED</b> above Activation Temperature
Maximum Temperature	81° C / 117° F
Activation Temperature	
Nom.	21° C (70.0° F)
Max.	24° C (75° F)
Min.	18° C (65° F)
Max. Reset Temperature	
Max.	24° C (75° F)
Min.	21° C (70° F)
Tolerance	+/- 3° C (+/- 6° F)
Lead Lengths	6" #20 AWG Leads



GEORGE RISK INDUSTRIES, INC.  
G.R.I. PLAZA  
KIMBALL, NE 69145



MADE IN U.S.A.

TOLL-FREE 1-800-445-5218  
TOLL-FREE 1-800-523-1227  
(308) 235-4645  
FAX (308) 235-3561

E-MAIL: [grisales@megavision.com](mailto:grisales@megavision.com)  
WEB SITE: [www.grisk.com](http://www.grisk.com)