

# 269R/270R/269SN

ADEMCO's series of hold-up devices have been designed for silent operation. Available in a stainless steel cover or hardwired, V-Plex and wireless versions, they mount quickly and easily in discreet locations. They are ideally suited for use in locations such as banks, jewelry stores, retail establishments or any situation that requires hold-up notification.



Hold-up  
Devices

## FEATURES:

- Silent operation
- Double-pole double-throw contacts for multi-notifications
- Twin 45° screw terminals with EOL resistor splicing terminal
- Adhesive pads for temporary positioning while installing
- Stainless steel cover (269R and 269SN)
- Fully supervised
- Convenient reset key for testing and/or reset of alarm

## SPECIFICATIONS:

- Switch type: Plunger type DPDT
- Switch action: Selectable latching or momentary
- Switch rating: 0.2A @ 30VDC max.
- Connections: four position 45° screw terminal block for each output side with EOL resistor splicing terminals
- Operating temp: 14° F to 140° F
- Dimensions: 3.5"L x 2.0"W x 1.25"D
- Listed for UL636 Hold-Up alarm units and systems

## ORDERING:

Part No.	Description
269R	Hardwired Hold-Up switch with stainless steel cover
270R	Hardwired Hold-Up switch in plastic case
269SN	V-Plex Hold-Up switch with stainless steel cover (polling loop only)
5869	5800 Series Wireless Hold-Up Switch

165 Eileen Way, Syosset, NY 11791


Copyright ©2002 Pittway Corporation

ADEMCO is an ISO9001 Registered Company


**ADEMCO**  
**GROUP**

# 269R/270R/269SN


## FRONT WITH COVER REMOVED

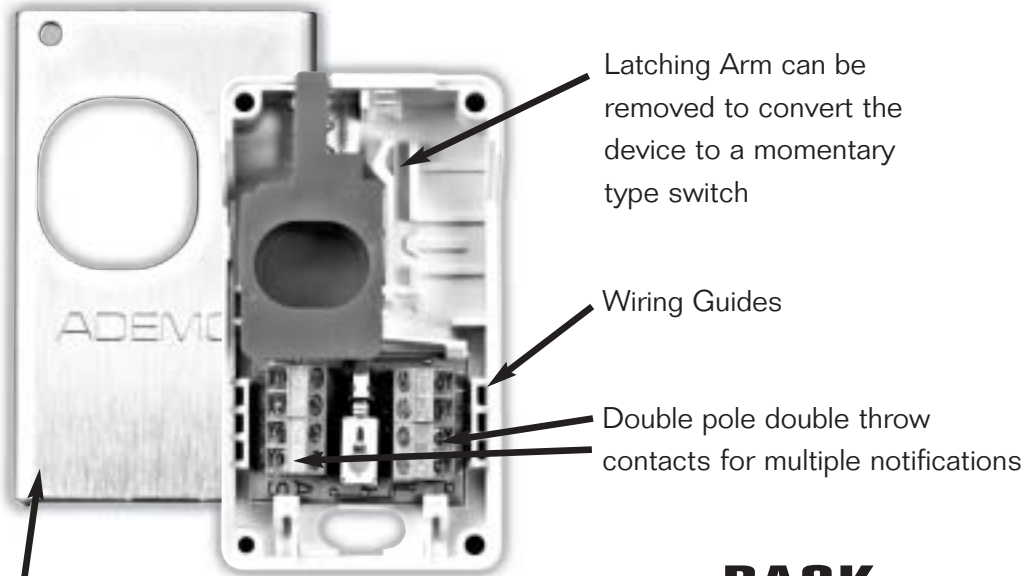

## BACK

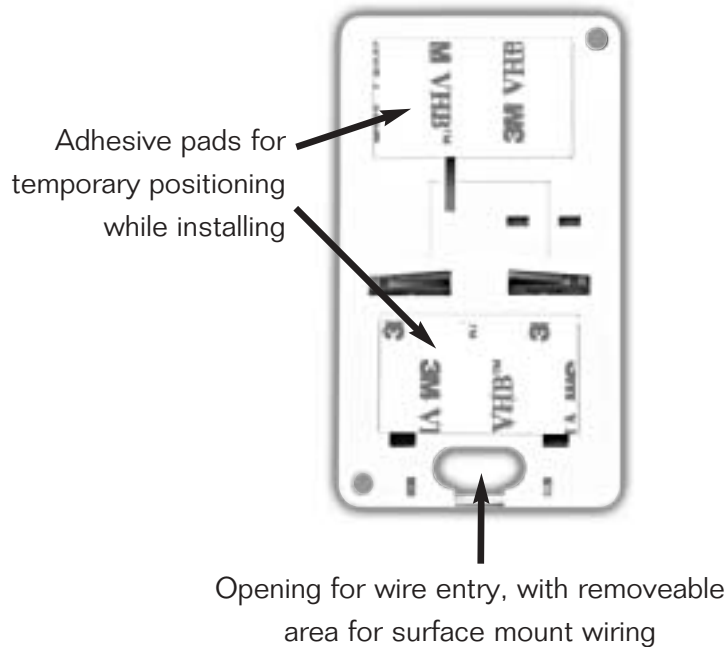

## SIDE

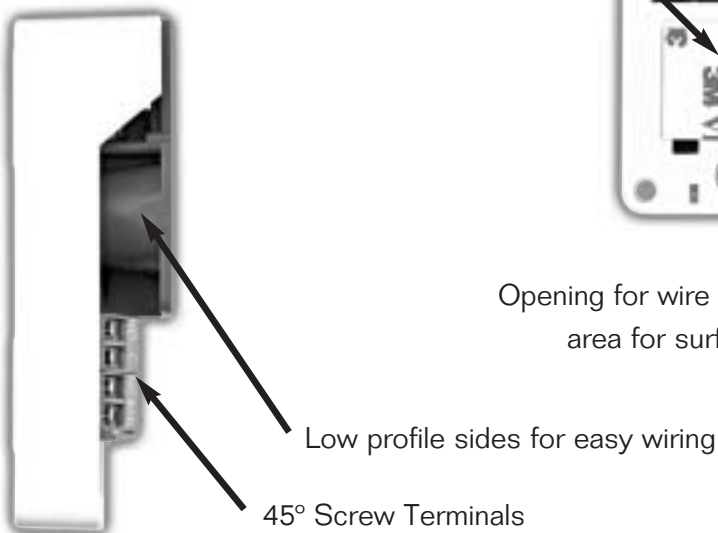

Hold-up  
Devices

165 Eileen Way, Syosset, NY 11791  
Copyright ©2002 Pittway Corporation  
ADEMCO is an ISO9001 Registered Company

1-800-467-5875